


Zugspannzangen

Typ W20/W25/W31.75/B32/B45

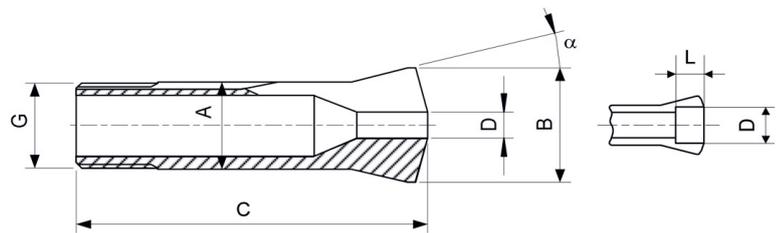

Typ/A	D	von	bis	steigend (mm)	L	G	B	C	Winkel
W 20/ø20 349E	Rund	0.3	0.4	0.1	Durchgehend	ø 19.7 × 15G/16	26.3	73	15°
		0.5	0.9						
		1.0	1.4						
		1.5	2.9						
		3.0	14.5						
	4-kant	4	10	0.5	28				
		11	14		Durchgehend				
		4	12		7.5				
	6-kant	4	12	1	Durchgehend				
		12	16		7.5				

Typ/A	D	von	bis	steigend (mm)	L	G	B	C	Winkel
W 25/ø25 364E	Rund	0.5	0.9	0.1	Durchgehend	ø 24.7 × 15G/16	33.7	97.6	15°
		1	1.4						
		1.5	2.5						
		3.0	19.05						
		19.06	21						
	4-kant	4	13	0.5	12.5				
		14	16		Durchgehend				
		4			12.5				
	6-kant	4	20	1	Durchgehend				
		17			12.5				

Typ/A	D	von	bis	steigend (mm)	L	G	B	C	Winkel
W 31.75 5C 385E	Rund	1.5	25.19	0.5	Durchgehend	ø 31.4 × 1.27	37.4	87	10° 3'
		25.2	27.99		40				
		28.00	28.99		10				
		29.00	29.99		7				
		30.00	31.00		4				

Typ/A	D	von	bis	steigend (mm)	L	G	B	C	Winkel
B 32/ø32	Rund	1.5	2.5	0.1	Durchgehend	ø 29.7 × 15G/16	40	106	15°
		3	24						
		24.01	28						
		28.01	30						
		30.01	32						
	4-kant	4	17	0.5	12				
					8				
6-kant	4	20	1.0	Durchgehend					

Typ/A	D	von	bis	steigend (mm)	L	G	B	C	Winkel
B 45/ø45	Rund	3	36	1	Durchgehend	ø 42, M42 × 1.5	53	115	15°
		37	40.99		53				
		41	41.99		14				
		42	42.99		12				
		43	43.99		10				
		44	45.00		8				

Bestellnummern - Beispiel:
B32/12 – für Rund ø 12 mm
B32/c12 – für 4-kant 12 mm
B32/s12 – für 6-kant 12 mm

«Weitere Grössen und
Abmessungen auf Anfrage»